


ROBINSON®

R22 & R44 EMU

Technician's Guide

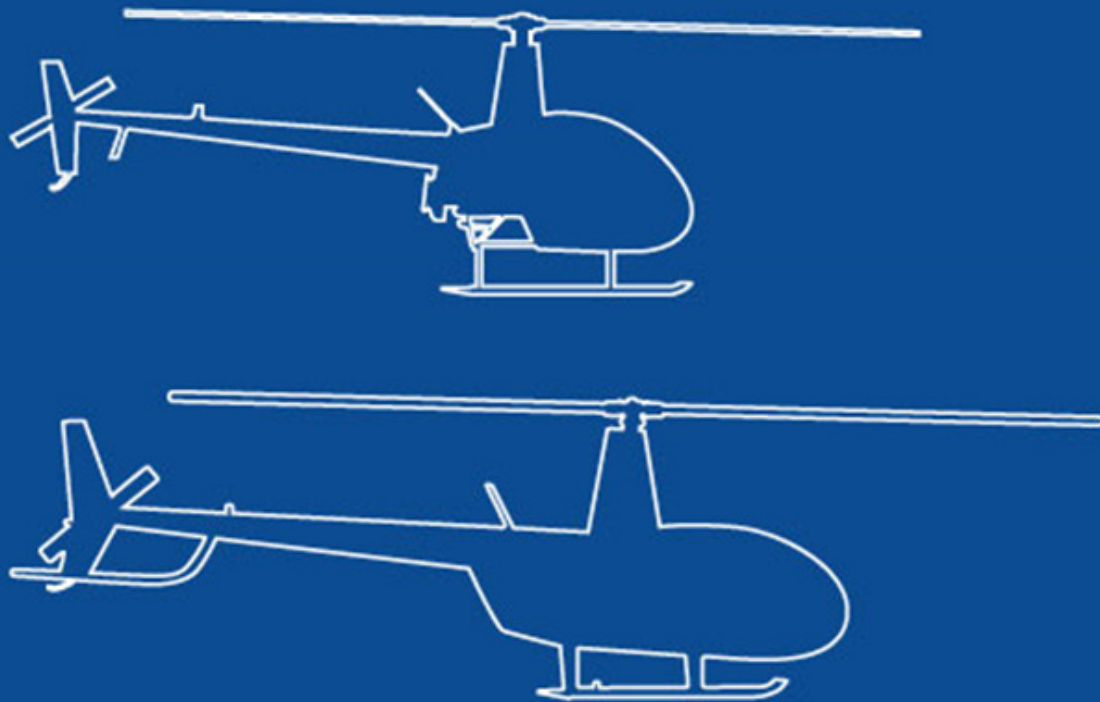

ROBINSON HELICOPTER COMPANY, TORRANCE, CALIFORNIA

Intentionally Blank

R22 & R44**ENGINE MONITORING UNIT (EMU)****TECHNICIAN'S PC SOFTWARE GUIDE****CONTENTS**

<u>Section</u>	<u>Title</u>	<u>Page</u>
1-00	Introduction	5
2-00	Equipment Description	6
3-00	Software Installation	9
4-00	Connecting to EMU	12
5-00	Reading Data	14
6-00	Disconnecting from EMU	15
7-00	Data Viewing	16
7-10	Files	16
7-20	Summary Report Screen	17
7-30	Exceedance History Screen	18
7-40	Flight History Screen	19
8-00	Technician Screen	20
8-10	Exceedance Reset	20
8-20	Clear EMU Log Data	20
8-30	Internal Clock	21
8-40	Program New EMU ID	21
9-00	Printing	22
10-00	Factory Communication	24
—	Revision Log	25

Intentionally Blank

R22 & R44**ENGINE MONITORING UNIT (EMU)****TECHNICIAN'S PC SOFTWARE GUIDE****1-00 Introduction**

This user guide describes personal computer (PC) based software designed for technicians to interface with the Engine Monitoring Unit (EMU) in R22 and R44 Helicopters. The software allows technicians to perform initial configuration of new units, view and download recorded data, and reset exceedance indications.

The latest version of the software and of this user guide are available on the Robinson website <https://robinsonheli.com/>.

NOTE

Although every effort has been made to make the EMU accurate and reliable, its intended use is as a maintenance aid only. Independent maintenance records kept by qualified personnel continue to serve as the official aircraft records, and it remains the pilot's responsibility to follow all operating limitations and report any observed exceedances.

Once a cause is identified and corrective action is taken, resetting exceedance indications prior to next flight is highly recommended. However, if the pilot determines the aircraft is in condition for safe flight, exceedance reset may be deferred and dispatch allowed. Reset as soon as practical.

In addition to the PC software described in this manual, an application intended for pilot use is available for Apple iPad devices through the Apple App Store. To get the application from an iPad, access the Apple App Store and search "Robinson EMU". A link is also provided on the Robinson website.

2-00 Equipment Description

The EMU is an electronic recording device housed in the same enclosure as the engine governor controller. It is installed behind the pilot's seatback in R22-series helicopters (Figure 1) and behind the left, rear seatback in R44-series helicopters (Figure 2).

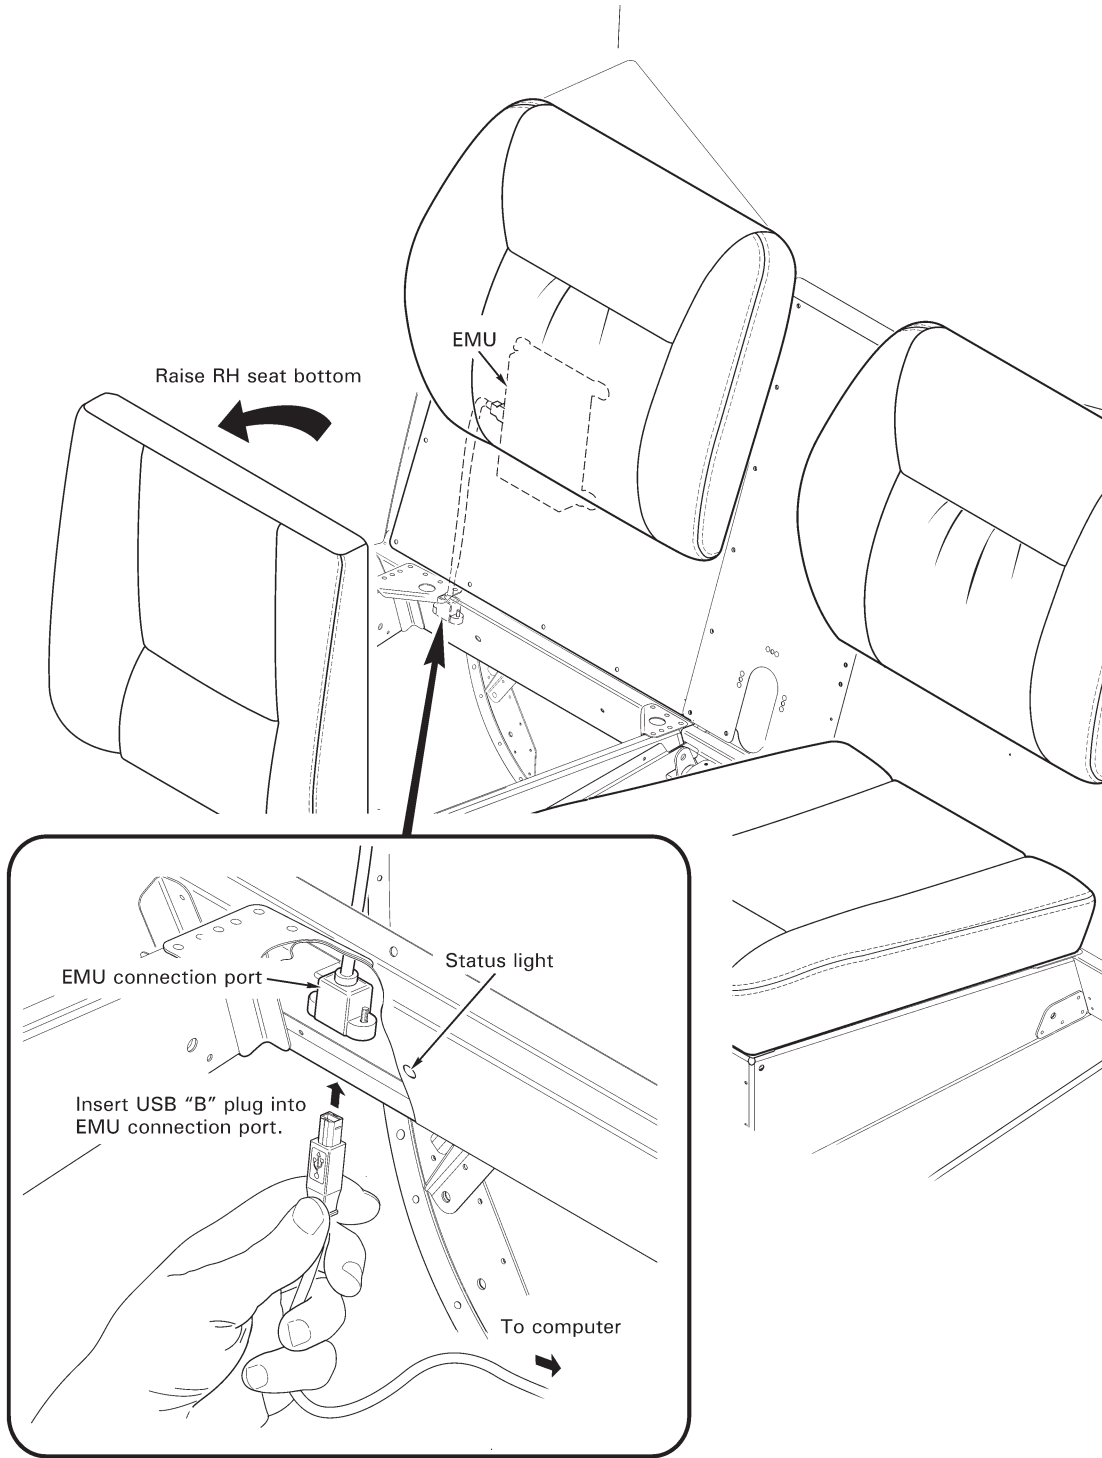


FIGURE 1 R22 EMU CONNECTION AND STATUS LIGHT

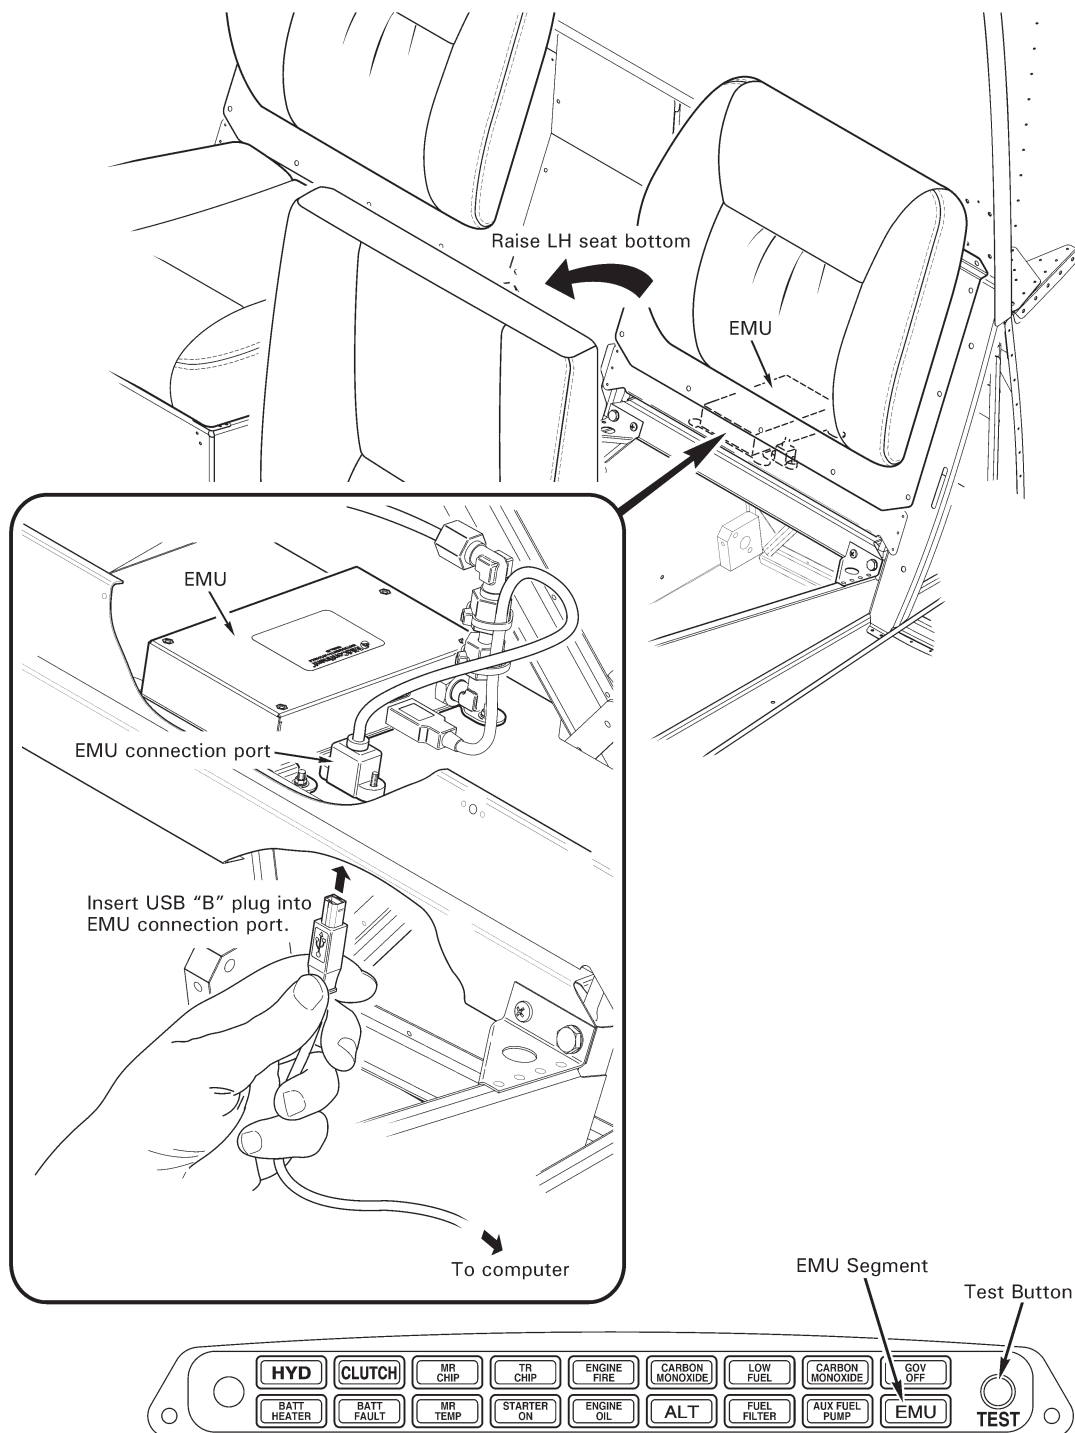


FIGURE 2 R44 EMU CONNECTION AND ANNUNCIATOR PANEL WITH EMU SEGMENT

2-00 Equipment Description (continued)

EMUs are standard equipment in new R22 and R44-series helicopters purchased after January 15, 2020. Helicopters with EMUs installed can be identified by the presence of their status indication lights as described below.

The EMU monitors engine speed, rotor speed, engine oil temperature, cylinder head temperature, manifold pressure, ambient pressure, and outside air temperature. Data is stored once per second. If the EMU detects an engine or rotor parameter outside of operating limits, an exceedance record is created and data is stored at a higher rate of 15 times per second during the exceedance event.

For R22-series helicopters, EMU status is indicated by an amber light on the aft wall of the compartment under the pilot's seat (Figure 1). For R44-series helicopters, status is indicated by the amber EMU segment on the annunciator panel (Figure 2). EMU status is intended to be referenced only for preflight and maintenance activities and not to be a distraction to the pilot in flight. Therefore, on R44-series helicopters, the EMU segment will only illuminate while the annunciator panel test button is depressed.

A steady (non-flashing) status indication is given for normal EMU operation. A fast flashing indication (4 times per second) is given if an exceedance has been recorded. A slowly flashing indication (once every two seconds) is given if a fault is detected with the EMU or one of its sensors.

The EMU receives power when the battery switch is on, so there will be no status indications with the battery switch off.

A commercially available USB-A to USB-B cable (standard printer cable, Figure 3) is required to connect the PC to the EMU.



FIGURE 3 CONNECTION CABLE

The connection port is on the underside of the horizontal panel just aft of the seat opening for the pilot's seat on R22-series helicopters and the left rear seat on R44-series helicopters (Figure 1 and Figure 2). The small end of the USB cable plugs in vertically upward. A light and mirror may be helpful to find the port the first time.

3-00 Software Installation

Interfacing with the EMU requires the proper USB driver to allow the computer to communicate with the EMU and the technician software program.

Driver

Administrator privileges on the PC are required to install the driver. For personal computers with only one user, the user will most likely already have these privileges. For computers managed by a company or organization, the system administrator may have to grant privileges.

Using the PC that is intended to interface with the EMU, on the Robinson website <https://robinsonheli.com/> go to *Publications* and select *Safety & User Guides*. Click on the R22 & R44 EMU *Driver Download* link.

Locate the downloaded .zip folder. Depending on the internet browser being used, the ribbon at the bottom will provide an option such as *show in folder* or *open folder*. The downloaded item will appear as:



Right click on the .zip folder and select, *extract all*. A pop-up window will appear. Make sure the *show extracted files when complete* box is checked, and click the *extract* button at the bottom of the window.

A new window will open. Double click on the *R22R44_driver_install.exe* file.

A dialog box may appear stating windows protected your PC. Select *more info* near the top of the window and then *run anyway* near the bottom.

A dialog box will appear asking if you want to allow this app from an unknown publisher to make changes to your device. Select *yes*.

A black box will appear for 1 or 2 seconds. Once it disappears, the driver has been installed.

Note: The driver may be installed before or after installation of the technician software. Once the driver has been installed one time, it is not necessary to re-install it if upgrading to a newer version of the technician software.

3-00 Software Installation (continued)


Technician Software Program

NOTE

To ensure proper installation and operation, previously installed versions of Technician Software Program are required to be uninstalled prior to installing latest version.

On the Robinson website, <https://robinsonheli.com/>, go to *Publications* and select *Safety & User Guides*. Click on the R22 & R44 EMU *Technician's Software* link.

Locate the downloaded .zip folder. Depending on the internet browser being used, the ribbon at the bottom will provide an option such as *show in folder* or *open folder*. The downloaded item will appear as:



Right click on the .zip folder and select, *extract all*. A pop-up window will appear. Make sure the *show extracted files when complete* box is checked, and click the *extract* button at the bottom of the window.

NOTE

Do not double click setup.exe inside of the .zip folder. Failure to extract/unzip folder prior to installing software may cause future issues when trying to uninstall software.


A new window will open. Double click on the *setup.exe* file.

A dialog box may appear stating windows protected your PC. Select *more info* near the top of the window and then *run anyway* near the bottom.

A series of installation windows with prompts will appear. Follow the prompts.

A dialog box will appear asking if you want to allow this app from an unknown publisher to make changes to your device. Select *yes*.

A successful installation will place the following icon on the desktop:



Intentionally Blank

| 4-00 Connecting to EMU

- | Step 1:** With helicopter battery switch off and PC power on, connect the USB cable between the PC and EMU. The EMU port is on the underside of the horizontal panel just aft of the seat opening for the pilot's seat on R22-series helicopters and the left rear seat on R44-series helicopters as indicated in Figure 1 and Figure 2.

NOTE

Connecting a PC to an already energized EMU (helicopter battery switch on) may cause an EMU exceedance to trigger. If this occurs, EMU will require an exceedance reset per Section 8-10.

- | Step 2:** Turn helicopter battery switch on. In approximately 10 seconds the EMU will initialize. After initialization, EMU's status indicator may exhibit a fast flash. (For R44-series helicopters, it is necessary to push and hold the annunciator panel test button to illuminate the EMU status indicator).

NOTE

A ground power source (e.g. battery charger) is recommended for EMU sessions longer than 10 minutes.

4-00 Connecting to EMU (continued)

Step 3: Launch the EMU software by double clicking EMU icon. The Connection screen shown below will appear. This indicates a successful connection and shows some basic information about the helicopter and EMU.

The fast flash rate, if present, will be replaced by the steady status indication after the software is launched, unless there is an actual recorded exceedance.



FIGURE 4 CONNECTION SCREEN

5-00 Reading Data

Either a specific date and time range of data, or all recorded data, can be read from the EMU. The USB connection is limited to a data transfer rate of approximately 500 records per second, or about 7 seconds to download one hour's worth of EMU data. 2200 hours of data requires about 4.5 hours to read. Therefore, it is recommended to periodically download recent data. Once downloaded, the recently downloaded data can be combined with existing data into a master file on the PC much faster than the download process.

From the connection page, click **File** and either **Read Recent Data from EMU** or **Read All Data from EMU**. If recent data is selected, a window will appear to enter the desired date and time range:

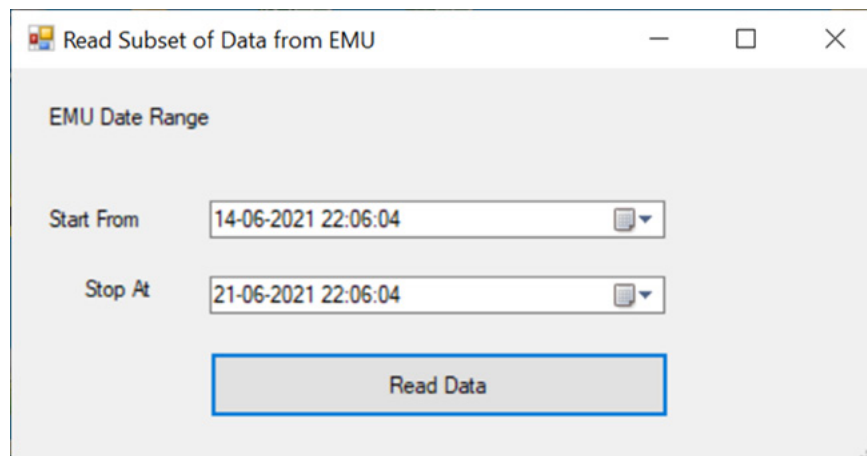


FIGURE 5 DATA RANGE SCREEN

The default range is one week leading up to and including the most recent recorded data. The date format is DD-MM-YYYY and the time is Coordinated Universal Time (UTC). A desired range can be typed into the boxes or selected using the dropdown arrows on the right. Be sure to apply the timezone correction for the local time zone. For example, if it is intended to look at data from a flight that began on 5 August 2020 at 9 AM in the Pacific Time Zone (UTC -7), the Start From entry would be:

05-08-2020 16:00:00

Click read data, and a green progress bar at the bottom of the EMU software window will show download progress. Once complete, the screen will switch to the Flight History screen (see Section 7-00).

NOTE

Reading the data DOES NOT save it to the PC. Saving a file to the PC requires a separate action. See Section 7-00.

6-00 Disconnecting from EMU

Step 1: Disconnect USB cable between the PC and EMU.

Step 2: Turn helicopter battery switch off.

NOTE

Turning off helicopter battery switch while PC is still connected may cause an EMU exceedance to trigger. If this occurs, EMU will require an exceedance reset per Section 8-10.

7-00 Data Viewing

7-10 Files

Once data has been retrieved, it may be saved as a file on the PC. Click *File, Save Data to File*. A default "Logs" directory is selected by the software. Any directory may be used with standard Windows navigation. A default filename associated with the helicopter model and serial number and date the file is created will be assigned. For example:

R44_1140_20200926.emu would be the default filename for a EMU data from R44 S/N 1140 saved on September 26, 2020.

As with the directory, the user may choose to type a different filename.

The created file has the extension .emu and can only be read by the EMU software.

Once a file has been saved to the PC, it can be accessed and read by the software without being connected to an EMU. Thus, data from various dates and times as well as various helicopters can be collected on the PC and reviewed at the technician's convenience.

As noted in Section 5, retrieval of multiple, short files is preferable to a long data download. To combine files, open one file, then select *File, Merge File Data*, and open the next data file. The software will merge each data set as it is loaded sorting all of the records by time. Once all desired files are loaded, save the result as a combined master file.

7-20 Summary Report Screen

The Summary Report screen is shown below.

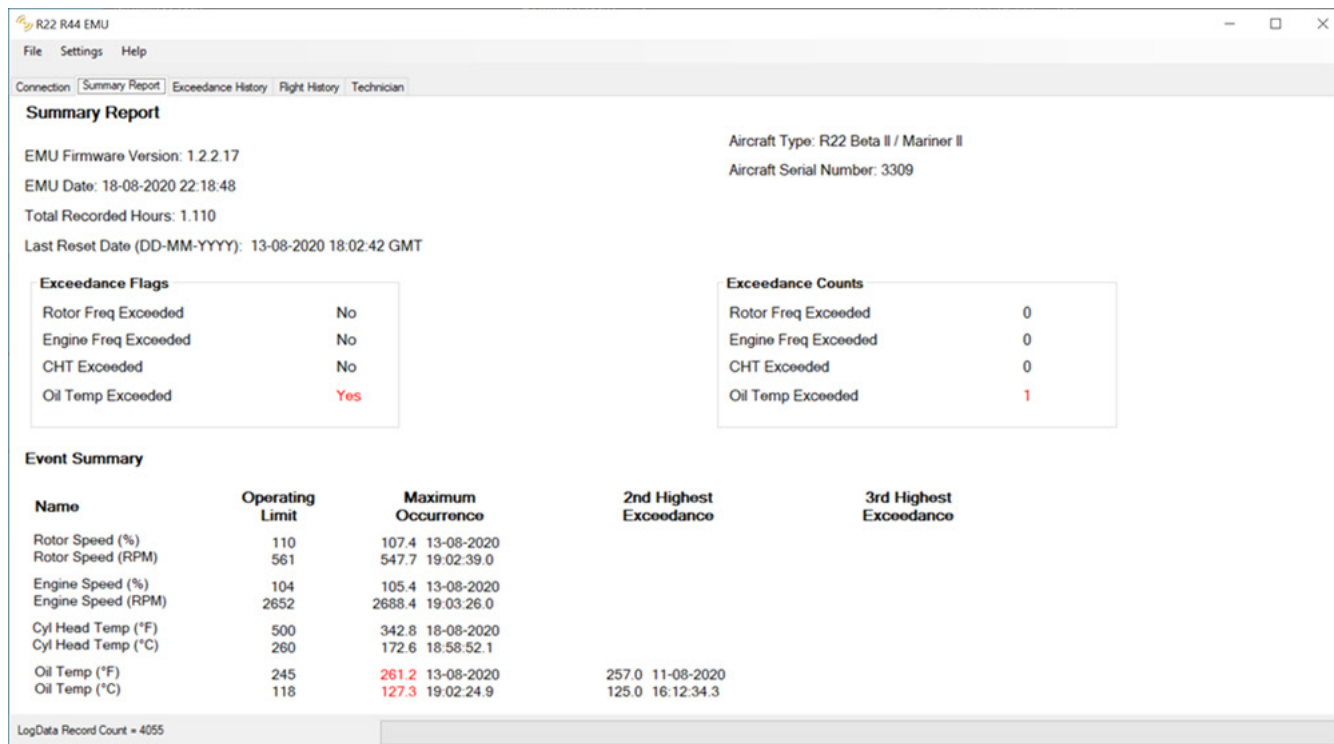


FIGURE 6 SUMMARY REPORT SCREEN

Any exceedances that have not been reset by a technician are displayed on this page. The “Exceedance Flags” and “Exceedance Counts” indicate the type and number of exceedances since the last reset. The “Event Summary” table provides details for the measured value, time, and date of the 3 highest exceedances (if present) displayed in order of severity for each monitored parameter. The “Maximum Occurrence” column always contains the maximum recorded value whether or not it was an exceedance. Values that are counted as exceedances are displayed in red text. The “2nd Highest Exceedance” and “3rd Highest Exceedance” columns will only be populated if there are 2, 3, or more exceedances.

NOTE

Values that trigger an exceedance indication are set at levels where maintenance action is required. This is slightly higher than the Operating Limit values and allows for some instrument tolerance to avoid nuisance indications. Therefore, it is possible to see a number in the “Maximum Occurrence” column slightly higher than the “Operating Limit” column but not shown in red text.

NOTE

The Summary Report screen displays information equivalent to the iPad “App” for pilots (see Section 1-00).

7-30 Exceedance History Screen

The Exceedance History screen is shown below. It shows all exceedance events for the data range loaded into the software. The Exceedance History screen is not cleared by technician resets. It maintains a historical record.

Navigation of the Exceedance History screen is similar to navigation of the Flight History screen (see Section 7-40).

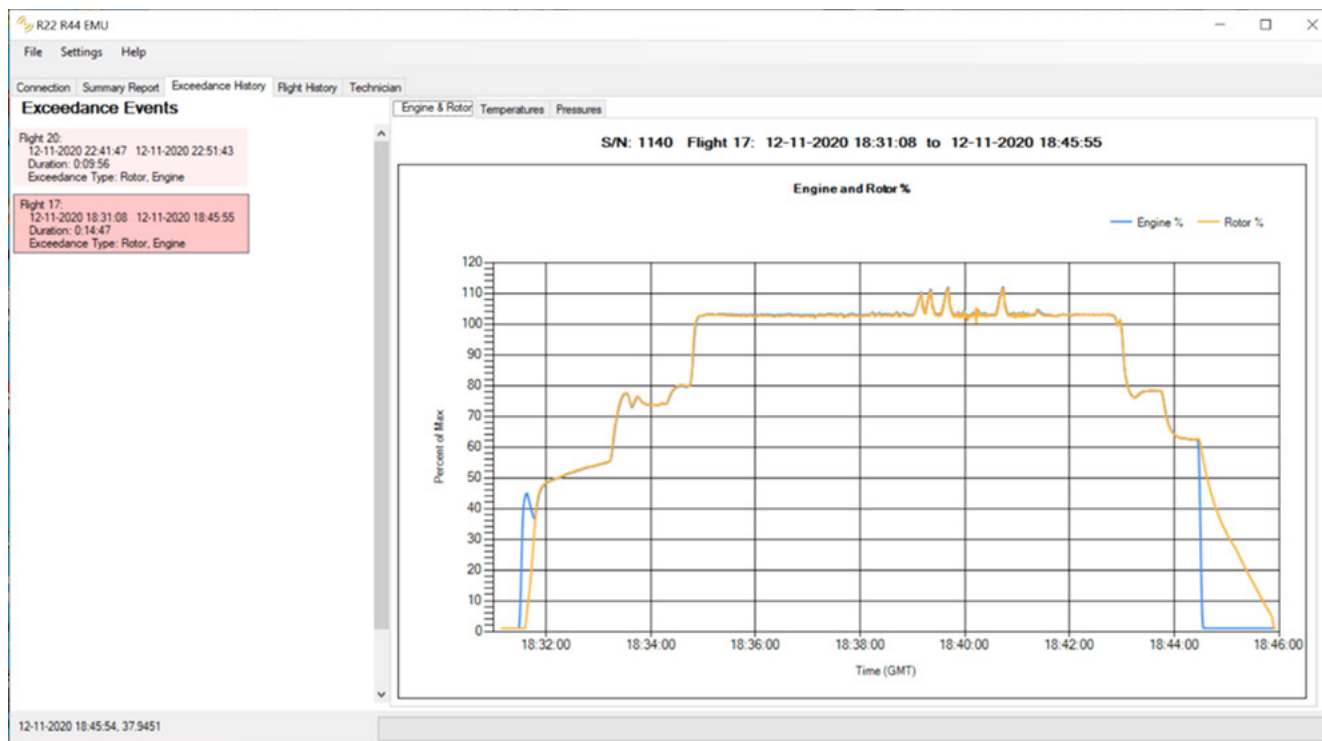


FIGURE 7 EXCEEDANCE HISTORY SCREEN

NOTE

Values that trigger an exceedance indication are set at levels where maintenance action is required. This is slightly higher than the Operating Limit values and allows for some instrument tolerance to avoid nuisance indications.

7-40 Flight History Screen

The Flight History screen is shown below. Select an individual flight by clicking on it in the list on the left side of the page. Graphical data for that flight will appear on the right side of the page. Select the appropriate tab on top of the graph for each parameter of interest.

Data can be displayed in either Metric or English units by using the Settings menu in the main menu bar.

Narrowing in on a specific time range can be accomplished by holding a left click and dragging the mouse or touch pad to highlight the desired range. Vertical scaling is fixed and cannot be adjusted. To reset a time range, re-click on the flight in the list on the left side of the screen.

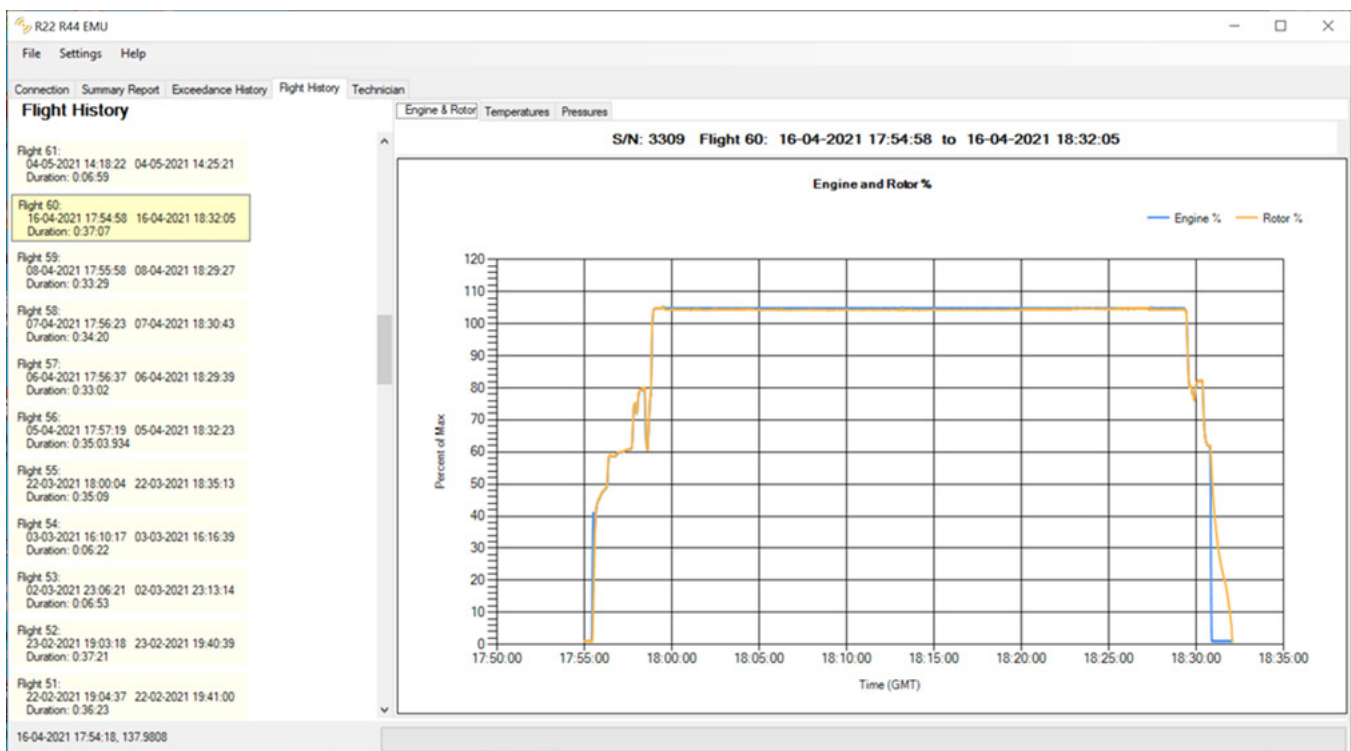


FIGURE 8 FLIGHT HISTORY SCREEN

8-00 Technician Screen

The Technician screen is shown below. It can be used to reset exceedances, clear EMU log data, or adjust the internal clock per Sections 8-10, 8-20, and 8-30. The technician screen is only available when the PC is connected to an EMU.

The screenshot shows the 'Technician's Page' of the R22 R44 EMU software. The window has a title bar 'R22 R44 EMU' and a menu bar with 'File', 'Settings', and 'Help'. Below the menu bar is a tabbed interface with 'Connection', 'Summary Report', 'Exceedance History', 'Flight History', and 'Technician' (selected). The main content area is titled 'Technician's Page' and contains several controls:

- Current EMU Date and Time: 29-07-2021 17:53:42 UTC
- Set EMU Date and Time to: 29-07-2021 17:53:38 UTC
- Calibrate Clock
- Exceedance Reset
- Current EMU ID: "M 222222"
- Aircraft Type: R44 Cadet
- Set New EMU ID section with a dropdown for Aircraft Type (set to '<Select Aircraft>'), a text input for Aircraft Serial Number, and a 'Set EMU ID' button.
- Clear EMU Log Data

A status bar at the bottom indicates 'Connected to EMU'.

FIGURE 9 TECHNICIAN SCREEN
Firmware Version 1.3.0.24 shown

8-10 Exceedance Reset

Pressing the Exceedance Reset button will clear all exceedances from the Summary Report page and reset the flashing status indicator. Pilots refer to the status indicator during their preflight inspection and are instructed to seek technician assistance for a flashing indicator. Therefore, a reset should only be done once the technician determines the cause of the exceedance and takes appropriate corrective action. The Exceedance History screen (Section 7-30) retains a historical record of all exceedances regardless of whether they are reset.

8-20 Clear EMU Log Data

Pressing the Clear EMU Log Data button will permanently delete all historical log data stored in the EMU. This action cannot be undone and should only be performed if you are certain that the log data is no longer required.

8-30 Internal Clock

The EMU uses an internal clock for time and date. The clock may be inaccurate by as much as a few seconds per day. The EMU clock time and date are displayed along with the PC clock time and date on the left side of the screen. If the technician notices a significant error in the time and date, the internal clock may be synchronized to the PC clock by clicking the "Set EMU Date and Time..." button.

When helicopter electrical power is off, the internal clock runs on a small battery inside the EMU. The battery is designed to last approximately 8 years. After the battery dies, each flight will be logged as starting 10 minutes after the end of the previous flight. This way, data is still recorded, and the order of events is maintained, even though the date and time recorded are no longer correct.

8-40 Program New EMU ID

A new EMU must be programmed with the helicopter model and serial number. For new EMUs, the technician screen will include the appropriate fields as shown in Figure 10.

The screenshot shows the 'Technician's Page' of the R22 R44 EMU software. The window has a menu bar with 'File', 'Settings', and 'Help'. Below the menu bar is a tabbed interface with 'Connection', 'Summary Report', 'Exceedance History', 'Flight History', and 'Technician' (selected). The main content area is titled 'Technician's Page' and contains several sections:

- Current EMU Date and Time:** 29-07-2021 17:57:52 UTC
- Set EMU Date and Time to:** 29-07-2021 17:57:48 UTC
- Calibrate Clock** button
- Exceedance Reset** button
- Current EMU ID:** ""
- Aircraft Type:** Set New EMU ID
- Aircraft Serial Number:** A text input field.
- Aircraft Type:** A dropdown menu with '<Select Aircraft>' selected.
- Set EMU ID** button
- Clear EMU Log Data** button

At the bottom of the window, a status bar indicates 'Connected to EMU'.

FIGURE 10 TECHNICIAN SCREEN FOR NEW EMU WITH FIELDS FOR HELICOPTER INFORMATION
Firmware Version 1.3.0.24 shown

9-00 Printing

The EMU software has context-sensitive printing. While the Summary Report tab is displayed, selecting Print will print just the Summary page.

Aircraft Type: R22 Beta II / Mariner II Aircraft Serial Number: 3309

Summary Page

Total Recorded Hours: 37.212
Earliest Log Entry: 13-08-2020 18:33:33
Latest Log Entry: 02-07-2021 19:50:35
Log entry count: 136,983
Last Reset Date (DD - MM - YYYY): 13 - 08 - 2020 06: 02: 42 GMT

Exceedance Flags		Exceedance Counts	
Rotor Frequency Exceeded:	No	Rotor Frequency Exceeded:	0
Engine Frequency Exceeded:	No	Engine Frequency Exceeded:	0
Cylinder Head Temp. Exceeded:	No	Cylinder Head Temp. Exceeded:	0
Oil Temperature Exceeded:	No	Oil Temperature Exceeded:	0

Event Summary				
Name	Operating Limit	Maximum Occurance	2nd Highest Exceedance	3rd Highest Exceedance
Rotor Speed (%)	110	110.3 02-07-2021		
Rotor Speed (RPM)	561	562.4 14:59:04.5		
Engine Speed (%)	104	109.9 05-01-2021		
Engine Speed (RPM)	2652	2803.0 19:23:43.8		
Cylinder Temp (*F)	500	364.8 12-10-2020		
Cylinder Temp (*C)	260	184.9 18:49:31.6		
Oil Temp (*F)	245	184.0 15-06-2021		
Oil Temp (*C)	118	84.5 18:02:50.7		

EMU Internal ID: 00090000ADB29FF14E45439870170028
EMU Date: 09-07-2021 21:21:00
EMU Firmware Version: 1.3.0.2
PC Software Version: 1.0.0.60


Page 1 of 1Printed 29-07-2021 11:17:05

FIGURE 11 EXAMPLE PRINTED SUMMARY PAGE

9-00 Printing (continued)

Selecting Print while on the Exceedance History, or Flight History tabs will print the Summary page and the graphs for the currently selected flight.

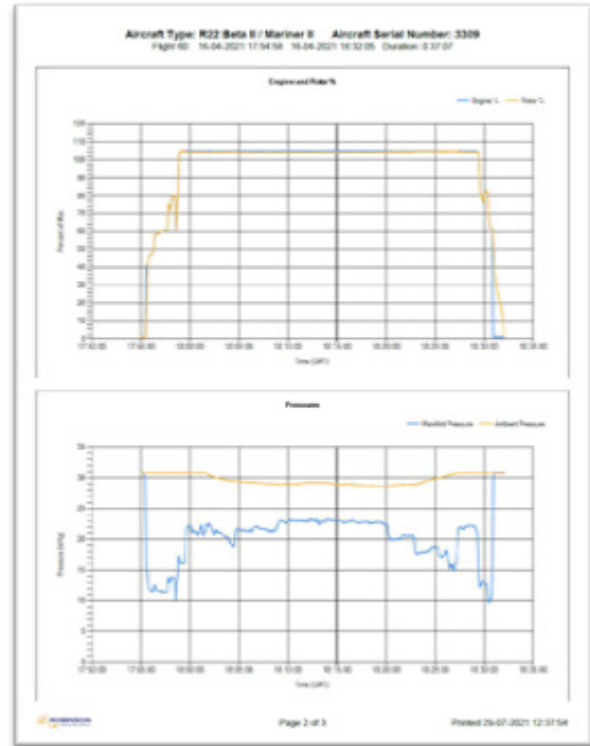
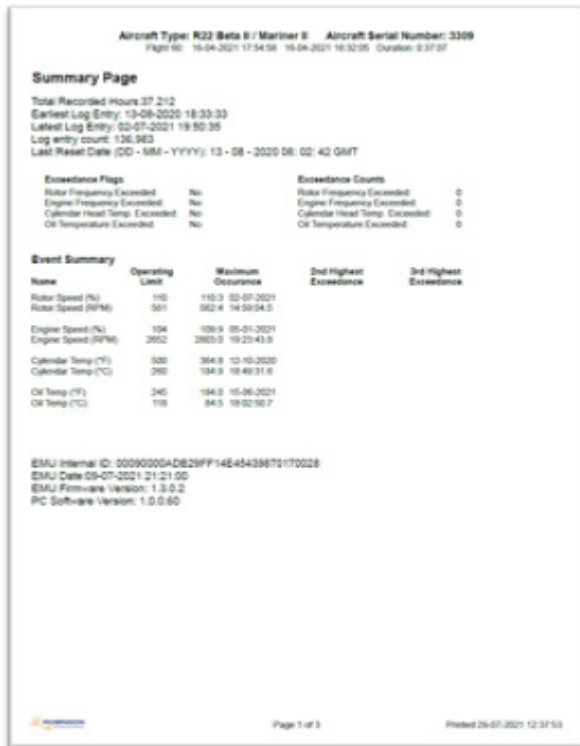


FIGURE 12 EXAMPLE PRINTED GRAPHS

| 10-00 Factory Communication

Robinson technical support personnel have software to view EMU data in more detail and assist in troubleshooting if required. For assistance, attach relevant .emu file to email correspondence (to minimize downtime, provide special file-handling instructions as required).

REVISION LOG

04 NOV 2025

The R22 & R44 Engine Monitoring Unit (EMU) Technician's Guide list of effective pages and effective dates are given below. If a previously issued page is not listed below, it is no longer an effective page and must be discarded. The issue or revision date is in bold at the top of the revision log page.

Please visit <https://robinsonheli.com/> to verify the issue or revision date is current.

<u>Page</u>	<u>Date</u>	<u>Page</u>	<u>Date</u>	<u>Page</u>	<u>Date</u>
1	04 NOV 2025				
2	04 NOV 2025				
3	04 NOV 2025				
4	04 NOV 2025				
5	12 JUL 2023				
6	12 JUL 2023				
7	12 JUL 2023				
8	12 JUL 2023				
9	04 NOV 2025				
10	04 NOV 2025				
11	12 JUL 2023				
12	12 JUL 2023				
13	04 NOV 2025				
14	04 NOV 2025				
15	12 JUL 2023				
16	12 JUL 2023				
17	12 JUL 2023				
18	12 JUL 2023				
19	04 NOV 2025				
20	04 NOV 2025				
21	04 NOV 2025				
22	04 NOV 2025				
23	12 JUL 2023				
24	12 JUL 2023				
25	04 NOV 2025				
26	04 NOV 2025				

Intentionally Blank